

# WINCH




## FEATURES & BENEFITS

- **Powerful and compact hydraulic winch**
- **Equipped 25 m (82 ft) of wire rope**
- **The operator can safely and easily control it from the operator's seat**

The MultiOne hydraulic winch enables towing of all kinds of objects (e.g. logs, poles, boats) from places where you cannot drive with the machine.

The winch is equipped with a safety net, 25 m (82 ft) of wire rope and a towing hitch. It is powered by a powerful hydraulic motor and mounts on MultiOne's quick attach plate. Use of the winch is simple, one person can easily handle it. Auxiliary hydraulics control lever (or switch) is switched to continuous flow (locking position) from the driver's seat, which releases the wire drum so that the wire can be pulled out by hand. When the wire is attached to the desired object, operator returns to driver's seat and turns the auxiliary hydraulics lever (or switch) to opposite direction and the winch begins to reel in the rope.

The winch stops as soon as the auxiliary hydraulics control lever (or switch) is released.

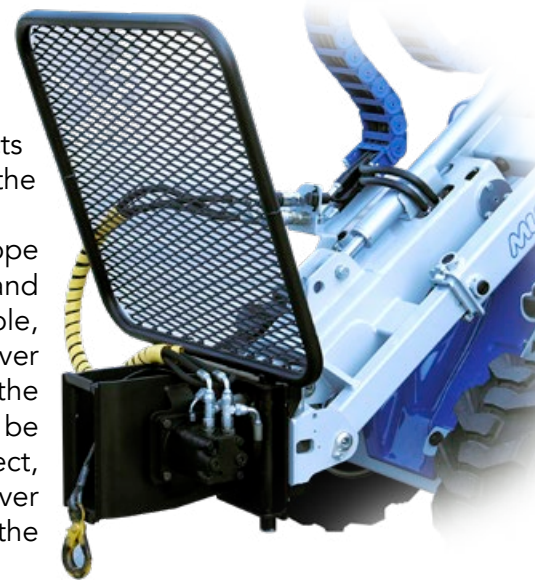

Model	Cable Length	Pulling Force	Max reeling speed	Weight	Code
Winch	25 m (82 ft)	1000 kg (2204 lbs)	2,5 m/s (8.2 ft/s)	95 kg (210 lbs)	<b>C891210</b>

Compatibility	1.1	2.3	4.2	5.2	5.3	5.3	6.3	7.3	8.4	8.5	9.5	9.6	7.0	7.1	6.3SD	7.3SD	8.4SD	9.5SD	12.4*	EZ
		Very compatible										Compatible				Not compatible				

(\*) C890025 adapter required

