
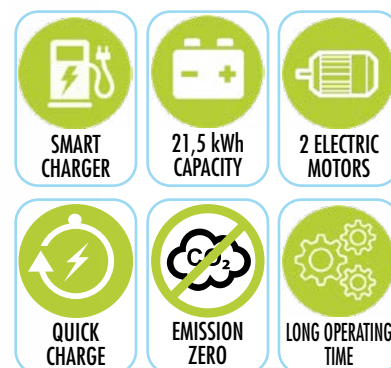


## EZ SERIES: EZ8

<http://tiny.cc/EZseries-EN>


|                                                                                                                                   |                                                                                                                             |                                                                                                                 |                                                                                                                        |                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <br>MAX LIFTING<br>CAPACITY<br><b>1420</b><br>kg | <br>BATTERY CAPACITY<br><b>21,5</b><br>kWh | <br>SPEED<br><b>12</b><br>km/h | <br>FLOW RATE<br><b>35</b><br>l/min | <br>LIFT HEIGHT<br><b>2,98</b><br>m |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|



| Model                                          | EZ 8                                 |
|------------------------------------------------|--------------------------------------|
| Transmission                                   | Hydrostatic                          |
| Drive speed (max.) <sup>(1)</sup>              | 12 km/h (7.5 mph)                    |
| Aux. hydraulics oil flow                       | 35 l/min (9.3 GPM)                   |
| Max. lifting height                            | 2,98 m (117.3 in)                    |
| Tipping load, max. <sup>(2)</sup>              | 1780 kg (3924 lbs)                   |
| Lifting capacity straight, max. <sup>(3)</sup> | 1420 kg (3130 lbs)                   |
| Breakout force / 50 cm                         | 1700 kg (3748 lbs)                   |
| Pushing force (c)                              | 2050 kgf (2050 kp)                   |
| Average ground pressure (w/standard tires)     | 958 kg/m <sup>2</sup> (196 lbs/sqft) |
| Turning radius: inside/outside                 | 825/2090 mm (32.5/82.3 in)           |
| Standard tires (Tractor profile)               | 26X12.00-12 ET-50                    |
| Weight                                         | 1570 kg (3470 lbs)                   |
| Product Code                                   | C963021                              |
| EZ8 Pack 1 (ACI with Multifunction joystick)   | C963022                              |

## Electric system and battery

|                                          |                                        |
|------------------------------------------|----------------------------------------|
| Battery type                             | LiFePO4                                |
| Battery capacity                         | 21,5 kWh                               |
| Operation time <sup>(4)</sup> ECO MODE   | 4,5 h                                  |
| Operation time <sup>(4)</sup> POWER MODE | 3 h                                    |
| Electric motors                          | 2                                      |
| Charging system                          | Integrated charger                     |
| Charger type                             | Sealed single-phase                    |
| Charger Input Voltage                    | 110 - 230 ± 10% VAC                    |
| Charger Input Frequency                  | 50 ÷ 60 Hz                             |
| Charger Absorbed Current                 | Max. 14 A                              |
| Charging Current (230 VAC)               | Max. 60 A                              |
| Charging Current (120 VAC)               | Max. 30 A                              |
| Charger plug type                        | CEE 2P+T                               |
| Charger Protection                       | Output short-circuit, Inverse polarity |


<sup>(1)</sup> Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

<sup>(2)</sup> Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

<sup>(3)</sup> Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

<sup>(4)</sup> The operation time of machine varies highly depending on the type of work it is performing. No hydraulic attachments used.

Note: Refer to the Operator's manual for the comprehensive load diagram.

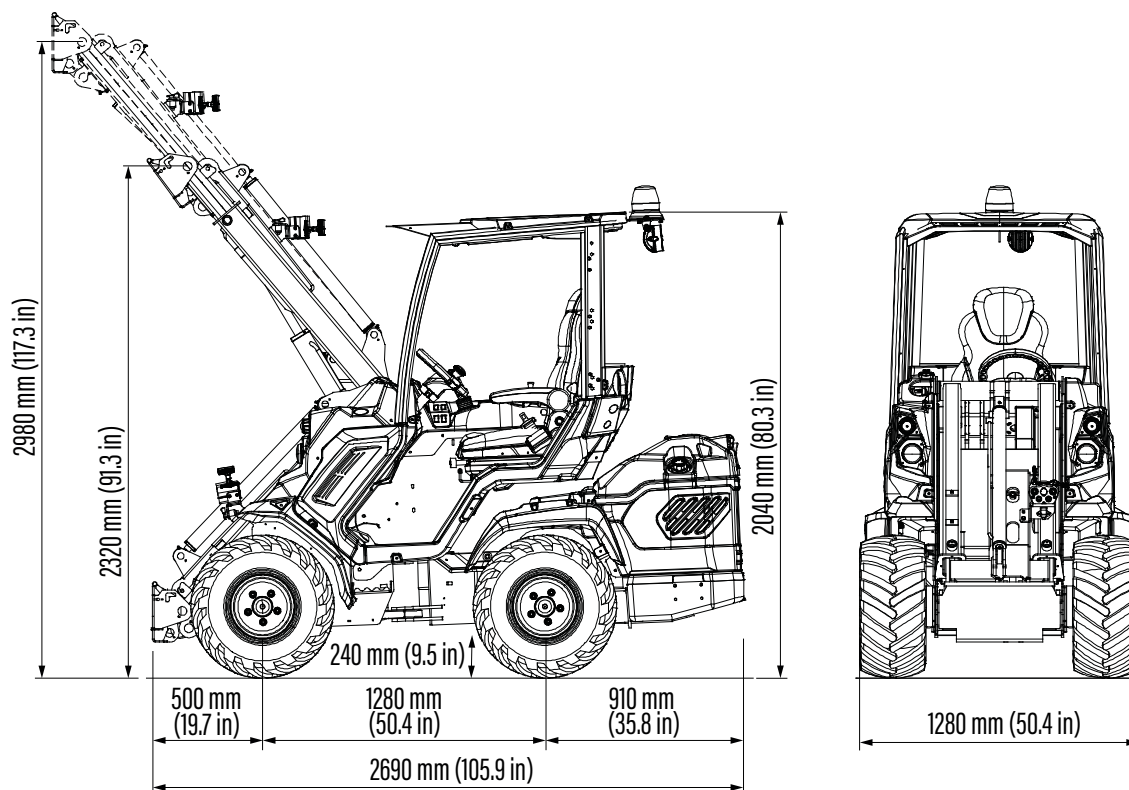

| Tires size        | Height            | Width             |
|-------------------|-------------------|-------------------|
| 23X8.50-12        | 2020 mm (79.5 in) | 1070 mm (42.2 in) |
| 23X10.50-12 ET-25 | 2020 mm (79.5 in) | 1130 mm (44.5 in) |
| 26X12.00-12 ET-50 | 2040 mm (80.3 in) | 1280 mm (50.4 in) |
| 27X8.50-15        | 2080 mm (81.9 in) | 1070 mm (42.1 in) |
| 27X10.50-15       | 2080 mm (81.9 in) | 1150 mm (45.3 in) |

## FEATURES

- Twin Motors Single Ended Circuits
- LI-ION Battery
- Integrated Smart Battery Charger
- External fast charging station available
- Zero Emission
- Low Noise
- Braking Energy Recovery System
- Unbreakable Body Panels
- 4WD hydrostatic Direct Drive motors
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- ACI with Multifunction joystick (22 functions) on Pack 1
- Self-locking multi-disk parking brake
- LCD graphic display with programmed service
- 2 front led working lights
- Ergonomic full adjustable suspension seat with armrests and seat belt
- Radial piston high efficiency and heavy duty wheel motors
- Hydraulic multiconnector
- ROPS-FOPS Level I

## EZ SERIES: EZ8 LONG RANGE

<http://tiny.cc/EZ8seriesEN>**LONG  
RANGE**


MAX LIFTING  
CAPACITY  
**1420**  
kg



BATTERY CAPACITY  
**29,2**  
kWh




SPEED  
**12**  
km/h



FLOW RATE  
**35**  
l/min



LIFT HEIGHT  
**2,98**  
m



**Li ION**  
BATTERY



| Model                                                   | EZ 8 Long Range                      |
|---------------------------------------------------------|--------------------------------------|
| Transmission                                            | Hydrostatic                          |
| Drive speed (max.) <sup>(1)</sup>                       | 12 km/h (7.5 mph)                    |
| Aux. hydraulics oil flow                                | 35 l/min (9.3 GPM)                   |
| Max. lifting height                                     | 2,98 m (117.3 in)                    |
| Tipping load, max. <sup>(2)</sup>                       | 1780 kg (3924 lbs)                   |
| Lifting capacity straight, max. <sup>(3)</sup>          | 1420 kg (3130 lbs)                   |
| Breakout force / 50 cm                                  | 1700 kg (3748 lbs)                   |
| Pushing force (c)                                       | 2050 kgf (2050 kp)                   |
| Average ground pressure (w/standard tires)              | 958 kg/m <sup>2</sup> (196 lbs/sqft) |
| Turning radius: inside/outside                          | 825/2090 mm (32.5/82.3 in)           |
| Standard tires (Tractor profile)                        | 26X12.00-12 ET-50                    |
| Weight                                                  | 1570 kg (3470 lbs)                   |
| Product Code                                            | C963023                              |
| EZ8 Long Range Pack 1 (ACI with Multifunction joystick) | C963024                              |

| Electric system and battery              |                                        |
|------------------------------------------|----------------------------------------|
| Battery type                             | LiFePO4                                |
| Battery capacity                         | 29,2 kWh                               |
| Operation time <sup>(4)</sup> ECO MODE   | 6 h                                    |
| Operation time <sup>(4)</sup> POWER MODE | 4,5 h                                  |
| Electric motors                          | 2                                      |
| Charging system                          | Integrated charger                     |
| Charger type                             | Sealed single-phase                    |
| Charger Input Voltage                    | 110 - 230 ± 10% VAC                    |
| Charger Input Frequency                  | 50 ÷ 60 Hz                             |
| Charger Absorbed Current                 | Max. 14 A                              |
| Charging Current (230 VAC)               | Max. 60 A                              |
| Charging Current (120 VAC)               | Max. 30 A                              |
| Charger plug type                        | CEE 2P+T                               |
| Charger Protection                       | Output short-circuit, Inverse polarity |


<sup>(1)</sup> Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

<sup>(2)</sup> Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

<sup>(3)</sup> Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

<sup>(4)</sup> The operation time of machine varies highly depending on the type of work it is performing. No hydraulic attachments used.

Note: Refer to the Operator's manual for the comprehensive load diagram.

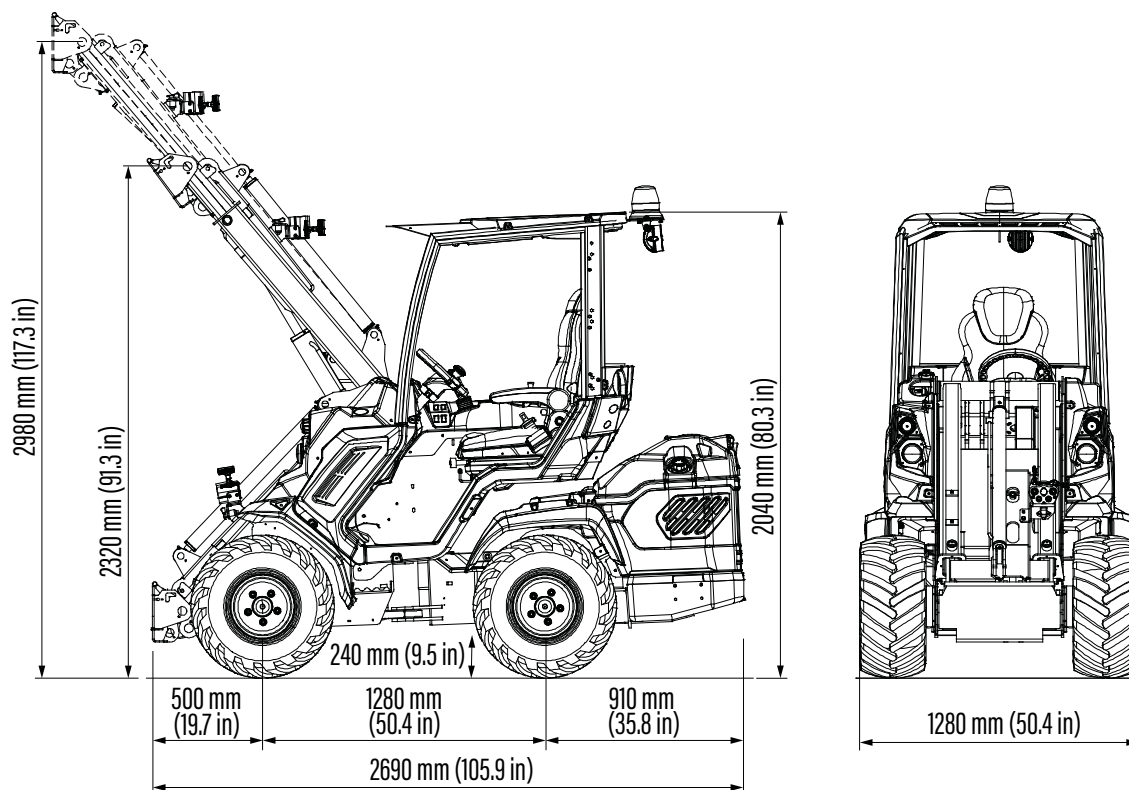

| Tires size        | Height            | Width             |
|-------------------|-------------------|-------------------|
| 23X8.50-12        | 2020 mm (79.5 in) | 1070 mm (42.2 in) |
| 23X10.50-12 ET-25 | 2020 mm (79.5 in) | 1130 mm (44.5 in) |
| 26X12.00-12 ET-50 | 2040 mm (80.3 in) | 1280 mm (50.4 in) |
| 27X8.50-15        | 2080 mm (81.9 in) | 1070 mm (42.1 in) |
| 27X10.50-15       | 2080 mm (81.9 in) | 1150 mm (45.3 in) |

## FEATURES

- Twin Motors Single Ended Circuits
- LI-ION Battery
- Integrated Smart Battery Charger
- External fast charging station available
- Zero Emission
- Low Noise
- Braking Energy Recovery System
- 4WD hydrostatic Direct Drive motors
- Unbreakable Body Panels
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- ACI with Multifunction joystick (22 functions) on Pack 1
- Self-locking multi-disk parking brake
- LCD graphic display with programmed service
- 2 front led working lights
- Ergonomic full adjustable suspension seat with armrests and seat belt
- Radial piston high efficiency and heavy duty wheel motors
- Hydraulic multiconnector
- ROPS-FOPS Level I

## EZ 7 / EZ8 - OPTIONS

| Options                                                                               | Code    |
|---------------------------------------------------------------------------------------|---------|
| 2" Hitch receiver (not compatible with C883036)                                       | C883062 |
| 3 additional working LED lights                                                       | C883018 |
| Automatic coupling plate                                                              | C880015 |
| Attachment coupling plate for rear mounting (not compatible with C883036)             | C880031 |
| Beacon light                                                                          | C883039 |
| Driver area cover                                                                     | C880049 |
| Fast charging station 160A (EZ8 only)                                                 | C883808 |
| Fast charging station 95A (EZ8 only)                                                  | C883809 |
| Flat face coupling kit                                                                | C880221 |
| Floating boom valve                                                                   | C883011 |
| GPS tracker                                                                           | C883075 |
| Left protection bar for operator                                                      | C883030 |
| Mirrors                                                                               | C880081 |
| Multifunction joystick with ACI                                                       | C883080 |
| Polycarbonate back window (smart cabin)                                               | C883035 |
| Polycarbonate right side (smart cabin)                                                | C883034 |
| Polycarbonate windscreen (smart cabin)                                                | C883000 |
| Rear bull bar with side extensions (not compatible with C883062, C885014 and C880031) | C883036 |
| Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)                   | C883069 |
| Rear side weights 160 kg (2x40 kg + 2x40 kg) / 352 lbs (2x88lbs+2x88lbs)              | C883077 |
| Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)                      | C880054 |
| Ride control (telescopic boom anti-rebound kit)                                       | C883095 |
| Skid tires 27x10.50-15, set of 4                                                      | C884012 |
| Skid tires 27x8.50-15, set of 4                                                       | C884011 |
| Snow chains for wheels 23x10.50-12, set of 2                                          | C880046 |
| Snow chains for wheels 23x8.50-12, set of 2                                           | C880041 |
| Snow chains for wheels 26x12.00-12, set of 2                                          | C880042 |
| Snow chains for wheels 27x8.50-15, set of 2                                           | C880045 |
| Tie down bracket on wheel hub, set of 4                                               | C883065 |

## EZ 7 / EZ8 - OPTIONS

| Options                                                      | Code    |
|--------------------------------------------------------------|---------|
| Torque divider                                               | C883600 |
| Tractor tires 23x10.50-12 ET-25, set of 4                    | C884007 |
| Tractor tires 23x8.50-12, set of 4                           | C884005 |
| Trailer coupling (not compatible with C883036)               | C885014 |
| Turf tires 23x10.50-12 ET-25, set of 4                       | C884008 |
| Turf tires 23x8.50-12, set of 4                              | C884006 |
| Turf tires 26x12.00-12 ET-50, set of 4                       | C884010 |
| Warning & Safety lights for road travel (with mirrors)       | C883814 |
| Wheel spacer 10 mm (0.4 in), set of 4 (max. 1 pcs for wheel) | C880090 |
| Wheel spacer 55 mm (2.2 in), set of 4 (max. 1 pcs for wheel) | C885010 |
| ACI Upgrade                                                  | C090027 |