

SNOW BLOWER HD

<http://tiny.cc/snowblower>

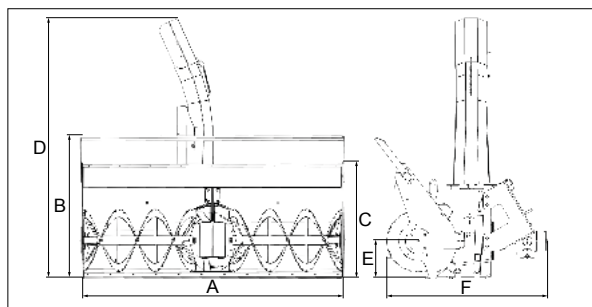

FEATURES & BENEFITS

- Heavy duty frame
- Efficient two-stage snow blower transmission with replaceable cutting edge

The snow blower is an efficient attachment to remove large volumes of snow from sidewalks, roads, or other large areas when snow needs to be spread out evenly. The two-stage blower is a powerful and efficient snow removal tool, even if the snow is wet and heavy. To achieve this efficiency, the auger breaks up the snow and the fan throws the snow out of the discharge chute.

The chute can be rotated 200° (±100°) and also the discharge chute height angle can be adjusted from the operator's seat. It is equipped with adjustable skids, to set the working height, and a tool to remove snow blocks.

Note: the floating boom valve on the machine is suggested.



Dimensions (cm/in)						
Mod.	A	B	C	D	E	F
100HD	116/46	94/37	65/26	144/57	/	98/38.5
130HD	146/57.4	94/37	64/25.2	143/56.3	28/11	98/38.5
160HD	160/63	89/35	71/28	163/64.2	24/9.5	99/39
180HD	180/71	89/35	71/28	163/64.2	24/9.5	99/39

Model	Width	Chute rotation	Weight	Code
100 HD (Heavy Duty) - ACI required	100 cm (39.4 in)	200° (±100°)	290 kg (640 lbs)	C891343
130 HD (Heavy Duty) - ACI required	130 cm (51.2 in)	200° (±100°)	314 kg (692 lbs)	C891342
160 HD (Heavy Duty)	160 cm (63.0 in)	200° (±100°)	250 kg (551 lbs)	C890460
180 HD (Heavy Duty)	180 cm (70.9 in)	200° (±100°)	280 kg (618 lbs)	C890466

Compatibility	1.1	2.3	4.2	5.2	5.3	6.3	7.2	8.4	8.5	11.6	11.9	EZ5	EZ7 EZ8
Model													
100 HD													
130 HD - 160 HD													
180 HD													

Very compatible

Compatible

Not compatible

MULTI1NE